

MAXIMO® EVOLUTION ACTIVE

High-End Sitting Comfort with Actively and Electronically Controlled Suspension





Unit 1 Forward Park, Sheene Road, Beaumont Leys, Leicester, LE4 1BF Tel: 0116 216 9910 | info@grammer.co.uk | www.grammer.co.uk




TECHNICAL DATA MAXIMO® EVOLUTION ACTIVE

The innovative actively and electronically controlled suspension of the Maximo Evolution Active reduces vibrations by an average of 40%, and the peak acceleration levels by as much as 75%. Active weight adjustment completely automatically sets the seat to the user's weight. These features, together with optimized suspension travel, let the seat fully tap its potential for delivering greater ergonomics and safety. In addition, an active seat climate system with removal of body moisture makes sure that the operator never again has to sit at the wheel drenched in sweat.

Features • Standard O Optional

·	
	Maximo®
	Evolution Active
Article no. fabric	1288762
Article no. fabric, operator presence switch (OPS) for Fendt	1297511
1 Document box	•
APS (Automatic positioning system)	•
2 Armrests, height-adjustable and foldable	
80 x 380 mm, adjustable angle, with fabric cover	•
Shock absorber	
Automatic	•
3 Swivel	
Adjustment range 20°	•
Pneumatic Suspension with 12V compressor	
Flectronic active controlled suspension	•
Suspension stroke, 120 mm	•
Weight adjustment Active (electronic)	•

Measurements (installation dimensions)

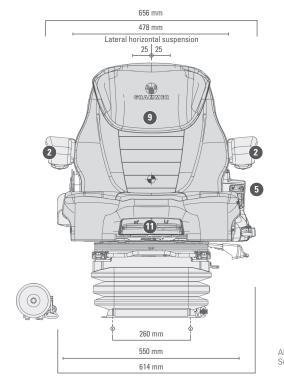



Pneumatic Suspension

Automatic Positioning

System



Electronic

Weight

Adjustment

Active Suspension



Pneumatic Lumbar Support



Lateral Suspension



Fore/Aft

Isolator



Automatic Shock Absorber



Active Climate System

	Maximo®
	Evolution Active
4 Height adjustment 80 mm infinite (air-assisted)	•
5 Climate system Active	•
6 Fore/aft adjustment 210 mm	•
Fore/aft isolator	•
7 Lumbar support, pneumatic	•
8 Adjustable backrest angle	•
Backrest extension, integrated	•
10 Lateral suspension	•
5 Seat heating	•
11) Adjustable seat cushion depth and angle	•
Operator presence switch (OPS)	•
Seat cushion width	550 mm
OPTIONAL FEATURES	
Restraint system	0

