

# CR100/M60



CR100/M60 suitable for Industrial & Construction applications.


Standard Seat Code	CR100/M60	CR100GR/M60
M echanical Suspension	•	•
Suspension Travel	60mm	60mm
Weight Adjustment	M anual - 130 KGs	M anual - 130 KGs
Slide Travel	160 mm	160mm
Seat Width	490mm	490mm
OPS (Operator Presence Switch)	o (CR100SW/M60)	o (CR100GR <mark>SW</mark> /M60)
Trim		
Black Vinyl	•	N/A
Grey Vinyl	N/A	•
Seat Belts		
Seat Belt Fixation Points	•	•
Testing	Conforms to	Conforms to
	ISO3795 / FM VSS302 (< 100 mm/min)	ISO3795 / FM V SS302 (< 100mm/min)
	SAE J386	SAE J386
	ISO 6683	ISO 6683
	ISO7096 - EM 5 & EM 9	ISO7096 - EM 5 & EM 9
	EN 13490 - IT1	EN 13490 - IT1
	EN 474-3	EN 474-3
	EN 500-1& EN500-4	EN 500-1& EN500-4
EU Compliance		
	ROHS	ROHS
	REACH	REACH


Kits	Part No.
2" Static Seal Belt	SBKS-1
2" Retractable Seat Belt - ALR	SBKALR-1
Armrests	A K10 0 - 1
Adaptor Plate for 260mm lateral x 282mm fore/aft mounting	A P 2 6 0
Adaptor Plate for 328mm lateral x 250mm fore/aft mounting	A P3 2 8

●: Standard ○: Option

**LEGAL DISCLAIMER**Whilst every effort is made to ensure the accuracy of the information provided, we cannot be held liable for any omissions or errors in the information herein.

## CR100/M60

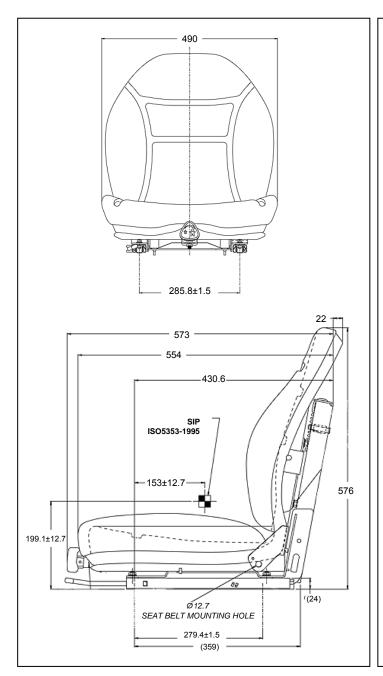

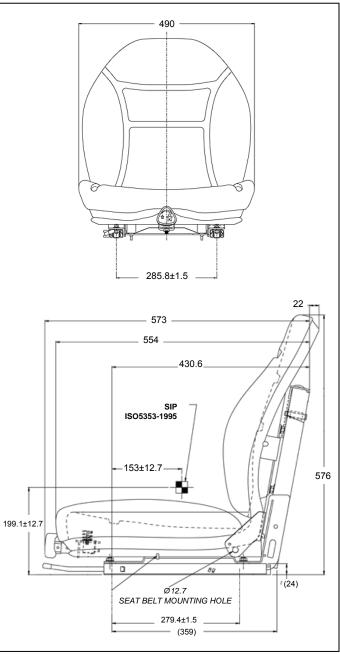

## CR100 / M60



### Copyright © 2009 PROMEK SEATING SYSTEMS

Promek Seating Systems Ltd.

Suite 2, First Floor, Ashbourne Hall, Ashbourne Business Park,

Dock Road, Limerick, Republic of Ireland.

Telephone: ++ 353 61 300440 Facsimile: ++ 353 61 302064

Web Site: www.promekseats.com E-mail Address: sales@promekseats.com

#### CR100SW / M60

#### ▶ We reserve the right to make technical and dimensional changes <</p>

IMPORTANT
Unless specified, seats are not supplied with seat belt fixation points. If seat belt fixation points are not provided, under no circumstances should it be attempted to fit seat belts. Seats with tested and approved seat belt fixation points and static or

seat beta. Seats with research and approved seat beta ination points and status of retractable lap belts are available.

The use of Roll-Over Protection Structures (ROPS) and the wearing of seat belts are mandatory on many vehicles, depending on the nature and environment of use. If the vehicle is equipped with a ROPS, then a seat without seat belts fitted should NOT be

If the vehicle is not equipped with a ROPS then seat belts should not be installed.

If the vehicle is not equipped with a ROPS then seat bets should not be installed. Seats are component parts. Therefore the purchaser of any seat must ensure that the seat installed is in accordance with the vehicle manufacturer's recommendations and all local rules and regulations. If in doubt, please check with your local authorised vehicle dealer before installing any seat. The seat should be installed by a qualified technician according to the vehicle manufacturer's recommendations. Please carefully read the Installation and Operating instructions provided with the seat before installation.

Strict adherence to all safety procedures is recommended.